



Art.-Nr: AGD009ML Exit sign Centralised power supply systems Recessed mounting, Central power supply (ML), CPS, 50m, IP40, Zinc die-cast, white

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central power supply system. Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.





More information www.rp-group.com/en/item/AGD009ML



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Recessed mounting
Recognition distance	50m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Zinc die-cast
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltageAC	230 V
Input frequency	50 / 60 Hz






Input voltage DC	216 V
Power max.	6,1 W
Power DS	6,1 W
Power BS	1,1 W
Ambient temperature DS	-5 °C to 40 °C
Ambient temperature BS	-5 °C to 40 °C
Depth	80 mm
Width	517 mm
Height	330 mm
Weight	2.67
Weight incl. packaging	3.32
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Customs tariff number	94056180
EAN	4260659565268





TECHNICAL DRAWING

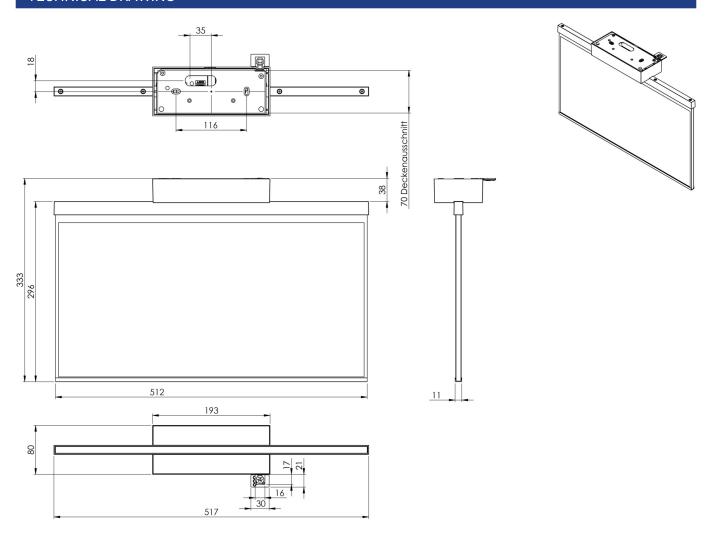

ACCESSORY LIST

AM-X-APA - Surface-mounted adapter AM/AX





RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AGD009ML-AZ	⅓ →	Central power supply (ML)	Central power supply	RAL 7016	€€€	Yes	low	Yes	1,920 per system	central
AGD009ML-E	1 3	Central power supply (ML)	Central power supply	Edelstahl	€€€	Yes	low	Yes	1,920 per system	central

As of: 29.01.2025 - Subject to technical changes and errors.