



Art.-Nr: AMRA003SC-AZ Exit sign Self-contained Wall-mounted flag, SelfControl (SC), 3 h, 22 m, IP20, Zinc diecast, Anthracite

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the wall. Thanks to the wall bracket, the escape and emergency routes are identified at right angles to the wall. This can be done on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



((

More information
www.rp-group.com/en/item/AMRA003SC-



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Wall-mounted flag
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Non-maintained / maintained
Input voltageAC	230 V






L	F0 / C0 I			
Input frequency	50 / 60 Hz			
Power max.	4,7 W			
Power maintained	4,7 W			
Power non-maintained	1,95 W			
Ambient temperature maintained mode	-5 °C to 40 °C			
Ambient temperature non-maintained mode	-5 °C to 40 °C			
Depth	79 mm			
Width	306 mm			
Height	196 mm			
Installation length	176 mm			
Installation width	68 mm			
Installation height	40 mm			
Weight	1.6			
Weight incl. packaging	1.96			
Connection cross-section	2.5 mm ²			
Switching input	Yes			
Emergency light blocking	Yes			
Battery connection	Connector			
Dimming function	Yes			
Customs tariff number	94056180			
EAN	4260581714390			





TECHNICAL DRAWING

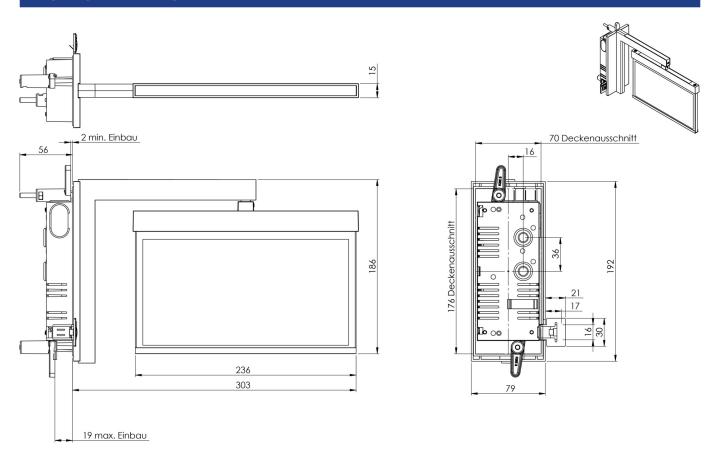

ACCESSORY LIST

AM-XBE -

RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AMRA003SC	(1)	SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
AMRA003SC-E	(1)	SelfControl (SC)	Single battery	Edelstahl	€	no	high	no	unlimited	itself

As of: 14.05.2025 - Subject to technical changes and errors.