



### Art.-Nr: AMRA408WL-E Exit sign Self-contained Wall-mounted flag, Wireless Professional (WL), 8 h, 22 m, IP20, Zinc die-cast, Stainless steel

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the wall. Thanks to the wall bracket, the escape and emergency routes are identified at right angles to the wall. This can be done on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.







More information www.rp-group.com/en/item/AMRA408WL-E



#### **TECHNICAL DATA**

Luminaire type	Exit sign		
Mounting	Wall-mounted flag		
Recognition distance	22 m		
Pictograph	Set		
Illuminant	LED		
Housing material	Zinc die-cast		
Housing color	Stainless steel		
Protection type (IP)	IP20		
Impact resistance (IK)	≥ 3		
Certification	WEEE, CE, 5 years warranty		
Insulation class	2		
Supply	Self-contained		
Monitoring	Wireless Professional (WL)		
Bridging time	8 h		
Battery	LiFePO4 6,4 V/1,2 Ah		
Operating mode	Non-maintained / maintained		
Input voltageAC	230 V		






Input frequency	50 Hz			
Power max.	4,7 W			
Power maintained	3,5 W			
Power non-maintained	0,8 W			
Ambient temperature maintained mode	-5 °C to 40 °C			
Ambient temperature non-maintained mode	-5 °C to 40 °C			
Depth	79 mm			
Width	306 mm			
Height	196 mm			
Installation length	176 mm			
Installation width	68 mm			
Installation height	40 mm			
Weight	1.63			
Weight incl. packaging	1.99			
Connection cross-section	2.5 mm <sup>2</sup>			
Switching input	Yes			
Emergency light blocking	Yes			
Battery connection	Connector			
Dimming function	Yes			
Customs tariff number	94056180			
EAN	4260682154743			





# TECHNICAL DRAWING

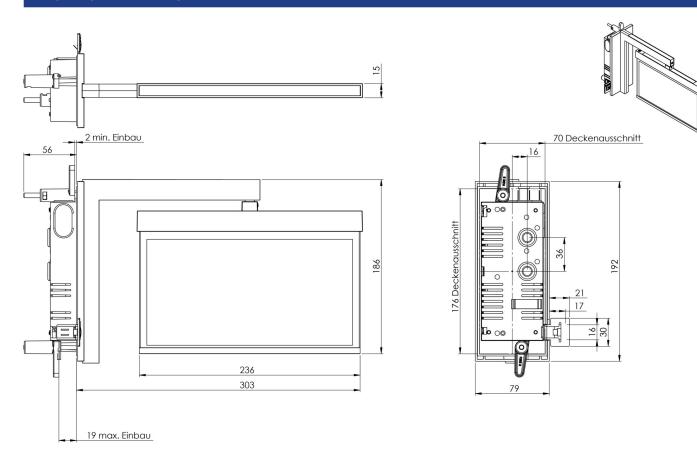

# ACCESSORY LIST

AM-XBE -

LFP3212.K-SET-2AKKU - Battery

## **RELATED PRODUCTS**

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AMRA408WL	<b>(1)</b>	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
AMRA408WL- AZ	<b>(1)</b>	Wireless Pro- fessional (WL)	Single battery	RAL 7016	€€	yes	low	yes	1,000 per system	central

As of: 16.04.2025 - Subject to technical changes and errors.