



### Art.-Nr: AXC008SC-E Exit sign Self-contained Ceiling mounting, SelfControl (SC), 8 h, 30 m, IP20, Zinc diecast, Stainless steel

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



 $\epsilon$ 

More information www.rp-group.com/en/item/AXC008SC-E



#### **TECHNICAL DATA**

Luminaire type	Exit sign			
Mounting	Ceiling mounting			
Recognition distance	30 m			
Pictograph	Set			
Illuminant	LED			
Housing material	Zinc die-cast			
Housing color	Stainless steel			
Protection type (IP)	IP20			
Impact resistance (IK)	≥ 3			
Certification	WEEE, CE			
Insulation class	2			
Supply	Self-contained			
Monitoring	SelfControl (SC)			
Bridging time	8 h			
Battery	NIMH 4,8 V/2,0 Ah			
Operating mode	Non-maintained / maintained			
Input voltageAC	230 V			






Input frequency	50 / 60 Hz				
Power max.	5,6 W				
Power maintained	3,2 W				
Power non-maintained	0,35 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	80 mm				
Width	312 mm				
Height	181 mm				
Installation length	176 mm				
Installation width	68 mm				
Installation height	40 mm				
Weight	1.68				
Weight incl. packaging	2.17				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
EAN	4260581715342				





# TECHNICAL DRAWING

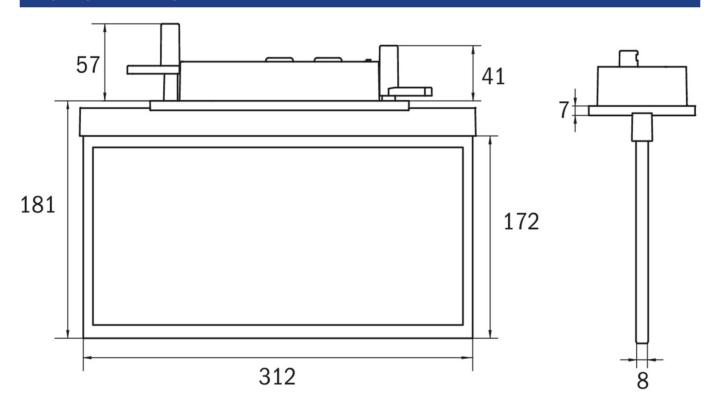

## **ACCESSORY LIST**

AM-XBE -

## RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AXC008SC	<b>A</b>	SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
AXC008SC-AZ	<b>F</b>	SelfControl (SC)	Single battery	RAL 7016	€	no	high	no	unlimited	itself

As of: 14.05.2025 - Subject to technical changes and errors.