



Art.-Nr: AXCP008SC-AZ Exit sign Self-contained Pendant recessed ceiling, SelfControl (SC), 8 h, 30 m, IP20, Zinc die-cast, Anthracite

Modern zinc die-cast emergency exit sign luminaire with pendant for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information www.rp-group.com/en/item/AXCP008SC-



TECHNICAL DATA

Luminaire type	Exit sign				
Mounting	Pendant recessed ceiling				
Recognition distance	30 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Zinc die-cast				
Housing color	Anthracite				
Protection type (IP)	IP20				
Impact resistance (IK)	≥ 3				
Certification	WEEE, CE				
Insulation class	2				
Supply	Self-contained				
Monitoring	SelfControl (SC)				
Bridging time	8 h				
Battery	NIMH 4,8 V/2,0 Ah				
Operating mode	Non-maintained / maintained				
Input voltage AC	230 V				






Input frequency	50 / 60 Hz				
Power max.	5,6 W				
Power maintained	3,2 W				
Power non-maintained	0,35 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	79 mm				
Width	317 mm				
Height	205 mm				
Installation length	176 mm				
Installation width	68 mm				
Installation height	40 mm				
Weight	1.84				
Weight incl. packaging	2.33				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
GTIN	4260581715199				





TECHNICAL DRAWING

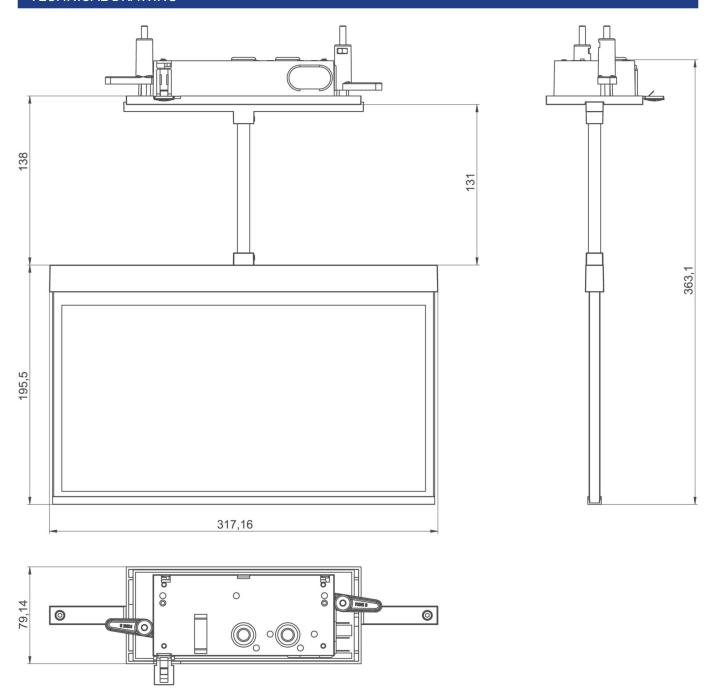

ACCESSORY LIST

AM-XBE -

AM-X-PKG -





RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AXCP008SC	₹ }	SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
AXCP008SC-E	**	SelfControl (SC)	Single battery	Edelstahl	€	no	high	no	unlimited	itself

As of: 05.09.2025 - Subject to technical changes and errors.