



### Art.-Nr: AXDP003SC Exit sign Self-contained Pendulum ceiling construction, SelfControl (SC), 3 h, 30 m, IP40, Zinc die-cast, White

Modern zinc die-cast emergency exit sign luminaire with pendant for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



( (

More information www.rp-group.com/en/item/AXDP003SC



#### **TECHNICAL DATA**

Luminaire type	Exit sign		
Mounting	Pendulum ceiling construction		
Recognition distance	30 m		
Pictograph	Set		
Illuminant	LED		
Housing material	Zinc die-cast		
Housing color	White		
Protection type (IP)	IP40		
Impact resistance (IK)	≥ 3		
Certification	WEEE, CE		
Insulation class	2		
Supply	Self-contained		
Monitoring	SelfControl (SC)		
Bridging time	3 h		
Battery	NIMH 4,8 V/2,0 Ah		
Operating mode	Non-maintained / maintained		
Input voltageAC	230 V		







Input frequency	50 / 60 Hz				
Power max.	5,7 W				
Power maintained	5,7 W				
Power non-maintained	0,35 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	80 mm				
Width	312 mm				
Height	228 mm				
Weight	2.03				
Weight incl. packaging	2.52				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
EAN	4260581715496				





# TECHNICAL DRAWING

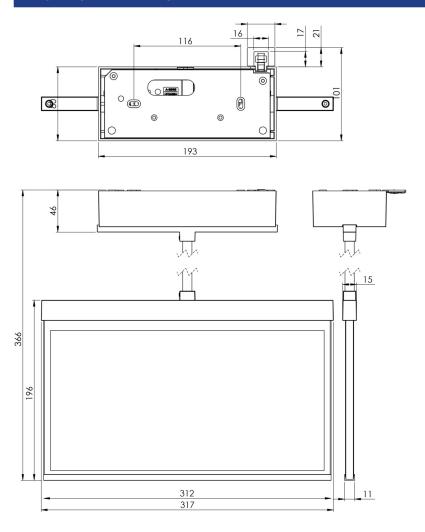

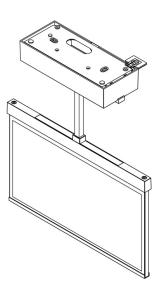

## **ACCESSORY LIST**

 $\label{eq:am-X-APA-Surface-mounted} \mbox{ AM-X-APA - Surface-mounted adapter AM/AX}$ 

AM-X-PKG -





## RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AXDP003SC- AZ	<b>₹</b>	SelfControl (SC)	Single battery	RAL 7016	€	no	high	no	unlimited	itself
AXDP003SC-E	<b>3</b> >	SelfControl (SC)	Single battery	Edelstahl	€	no	high	no	unlimited	itself

As of: 14.05.2025 - Subject to technical changes and errors.