



**Art.-Nr: AXRA403SC**

**Exit sign Self-contained**

**Wall-mounted flag, SelfControl (SC), 3 h, 30 m, IP40, Zinc die-cast, White**

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the wall. Thanks to the wall bracket, the escape and emergency routes are identified at right angles to the wall. This can be done on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/AXRA403SC](http://www.rp-group.com/en/item/AXRA403SC)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall-mounted flag
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, 5 years warranty
Insulation class	2
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 6,4 V/1,2 Ah
Operating mode	Non-maintained / maintained



Input voltageAC	180 V - 230 V
Input frequency	50 Hz
Power max.	4,2 W
Power maintained	3,3 W
Power non-maintained	0,9 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	80 mm
Width	344 mm
Height	229 mm
Installation length	176 mm
Installation width	68 mm
Installation height	40 mm
Weight	1.88
Weight incl. packaging	2.37
Connection cross-section	2,5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Customs tariff number	94056180
EAN	4260766555800



## TECHNICAL DRAWING

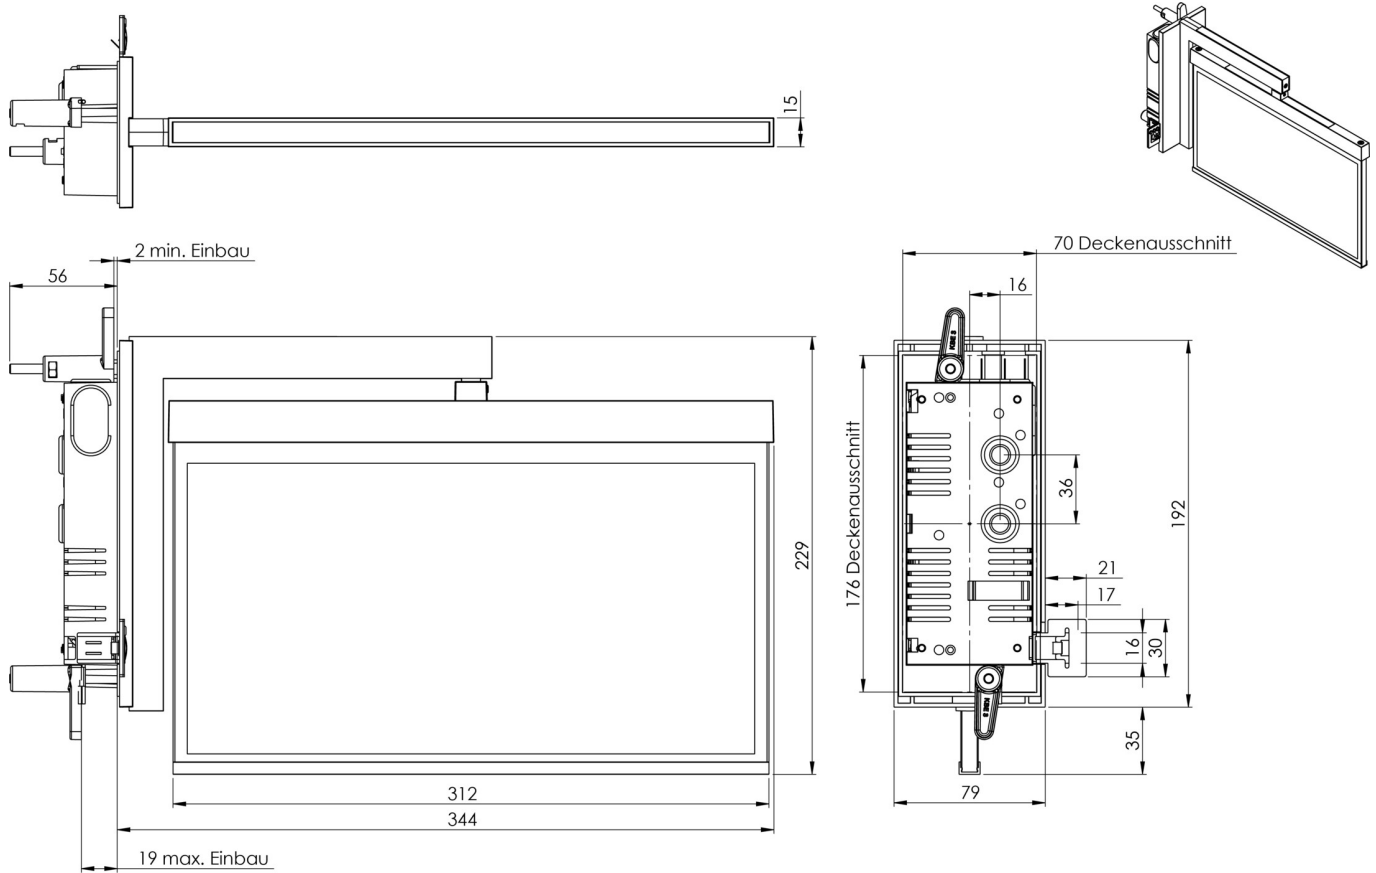

## ACCESSORY LIST

AM-XBE -

As of: 16.04.2025 - Subject to technical changes and errors.