



Art.-Nr: GABD408WL
Exit sign Self-contained
Surface mounting, Wireless Professional (WL), 8 h, 40 m,
IP40, Polycarbonate, White

Emergency exit sign luminaire with plastic pane for surface mounting on the ceiling and for identifying emergency and escape routes. It is based on the design of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design. The luminaires are equipped with modern LED illuminants and provide flexibility through their interchangeable pictograms.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.



More information

www.rp-group.com/en/item/GABD408WL



TECHNICAL DATA


| | |
|------------------------|-----------------------------|
| Luminaire type | Exit sign |
| Mounting | Surface mounting |
| Recognition distance | 40 m |
| Pictograph | acc. to Specification |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | 5 |
| Certification | WEEE, CE, 5 years warranty |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | Wireless Professional (WL) |
| Bridging time | 8 h |
| Battery | LiFePO4 6,4 V/1,2 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltageAC | 230 V |



| | |
|-----------------------------------------|---------------------|
| Input frequency | 50 Hz |
| Power max. | 5 W |
| Power maintained | 3,8 W |
| Power non-maintained | 0,8 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 80.9 mm |
| Width | 417.5 mm |
| Height | 245.5 mm |
| Weight | 1.42 |
| Weight incl. packaging | 2.07 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | Yes |
| Battery connection | Connector |
| Dimming function | Yes |
| Customs tariff number | 94056120 |
| EAN | 4260766551093 |



TECHNICAL DRAWING

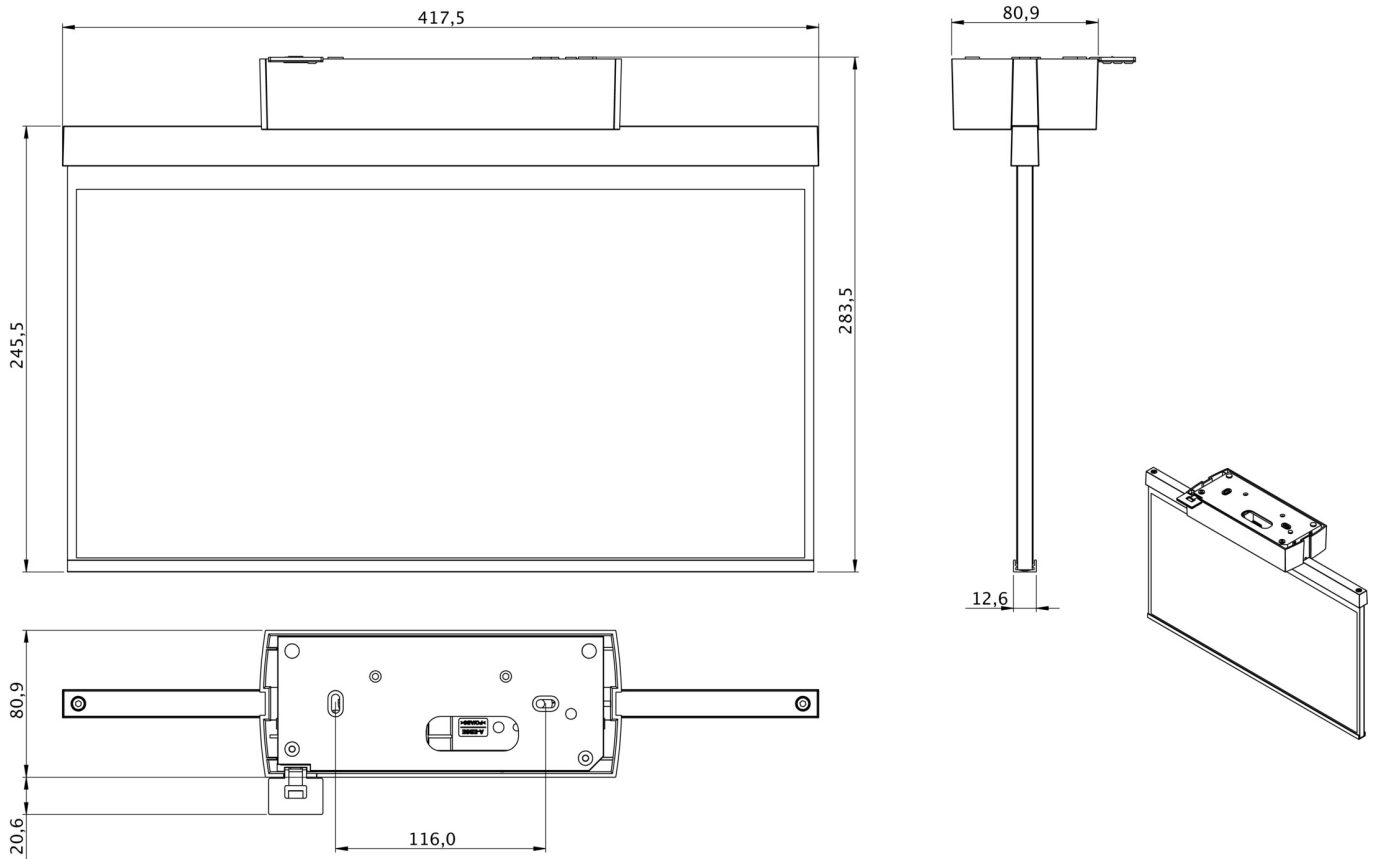

As of: 23.04.2025 - Subject to technical changes and errors.