



Exit sign

Art.-No.: LXW019ML

Emergency luminaire in a sleek Aluminium profile, matt anodized for wall mounting with an additional light source to light the Floor below the luminaire. Housing is openable toollessly. Applicable for maintained or non-maintained operation. The toolless Change and variable use of these pictograms provide planning security on site. Pluggable set of pictograms (left, right, down, up) is included in the scope of delivery. Emergency luminaire according to DIN EN 60598-1, DIN EN 60598-2-22 und DIN EN 1838.




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Wall mounted
Viewing distance	34 m
Pictograph	Set
Illuminant	LED
Housing material	Aluminium
Colour	Alu anodized
Mechanical rating IP	40
Impact resistance IK	3
Protection class	1
Supply	Central power supply system
Monitoring	ML - Central power supply system
Operation time	CPS
Operation mode	single luminaire switching
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	216 V
Power consumption max.	5,2 W
Power consumption maintained	5,2 W
Power consumption non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C / 40 °C
Ambient temperature non-maintained mode	-20 °C / 40 °C
Length	62 mm
Width	384 mm



Height	214 mm
Weight	1.47 kg
Weight incl. Packaging	1.67 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	No
Battery connector	None
Dimming function	Yes
Luminous flux mains mode	300 lm
Luminous flux emergency mode	300 lm
Customs tariff number	94056180
Country of origin	Germany
EAN	4260123681869

TECHNICAL DRAWING

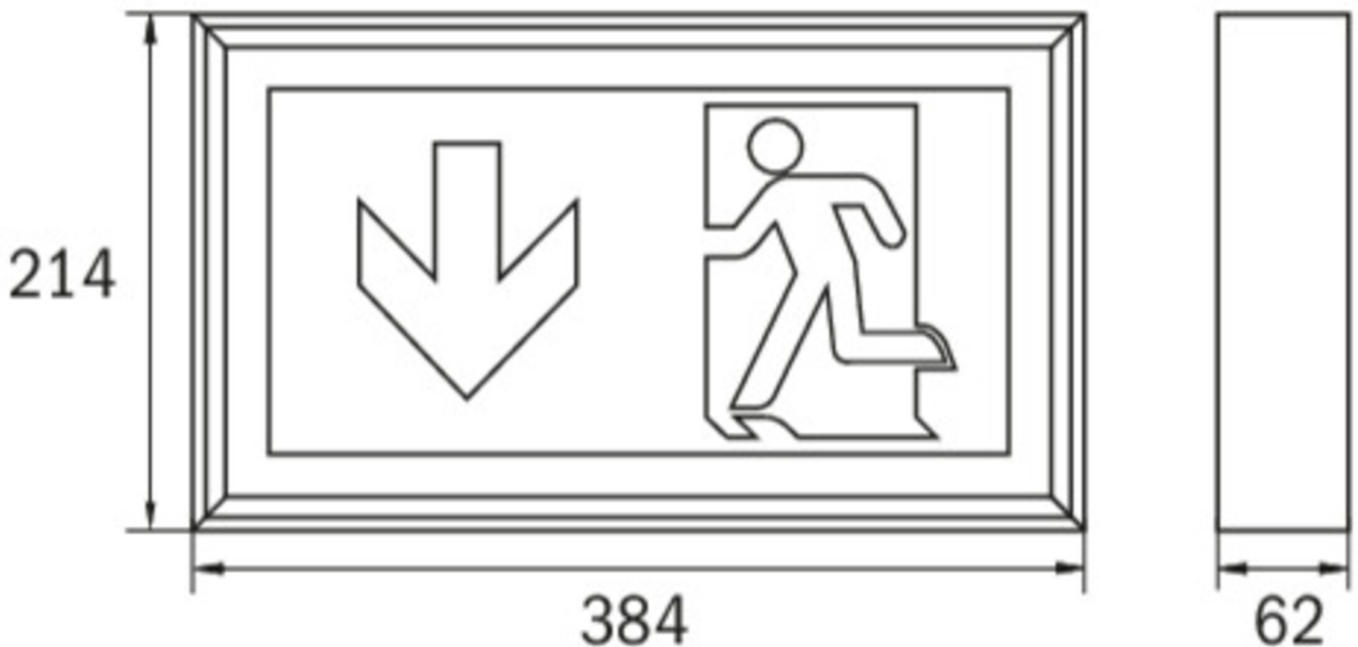

ACCESSORIES

BALL2 - Ball protection (8W) 450x280x125mm