



**Art.-Nr: PFD413SC-TT**  
**Exit sign Self-contained**  
**Surface mounting, SelfControl (SC), 3 h, 24 m, IP65,**  
**Polycarbonate, White**

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. The luminaire is equipped with a special lithium iron phosphate battery that can also be used at low temperatures. This technology ensures that both charging and discharging of the battery takes place within the temperature range specified for the luminaire.



More information

[www.rp-group.com/en/item/PFD413SC-TT](http://www.rp-group.com/en/item/PFD413SC-TT)



## TECHNICAL DATA




Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, 5 years warranty
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 3,2 V/3,3 Ah
Operating mode	Non-maintained / maintained
Input voltageAC	180 V - 250 V



Input frequency	50 Hz
Power max.	6,9 W
Power maintained	5,7 W
Power non-maintained	2 W
Ambient temperature maintained mode	-15 °C to 40 °C
Ambient temperature non-maintained mode	-15 °C to 40 °C
Depth	152 mm
Width	370 mm
Height	195 mm
Weight	1.1
Weight incl. packaging	1.23
Connection cross-section	2,5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	320 lm
Luminous flux emergency	320 lm
Customs tariff number	94056120
EAN	4260766558122



## TECHNICAL DRAWING

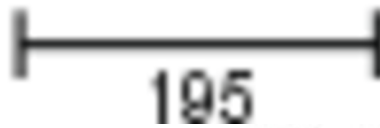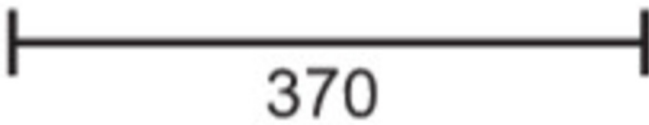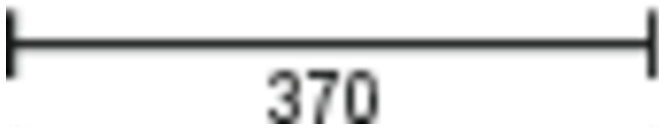

## ACCESSORY LIST

- 2PW-EB - Pendant
- 2DW-EB -
- DSA - Wire suspension
- PFER -

As of: 20.03.2025 - Subject to technical changes and errors.