



Art.-Nr: QCW029ML-AZ-BM

General light, Emergency light Centralised power supply systems

Universal, Central power supply (ML), CPS, , IP54, Zinc die-cast, Anthracite

Round zinc die-cast luminaire for general-purpose lighting with integrated motion detector. To illuminate escape and emergency routes in accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

A robust variant in a timeless design, suited to indoor and outdoor use. When mounting, the emergency light LED can be swung out without the need for tools, to perfectly illuminate the escape and emergency routes when mounted on a wall, for example. By means of the motion detector, which cannot be seen from the outside, the general-purpose light is switched independently of the emergency light.

Control and monitoring via central power supply system. Our motion detector (BM) reliably detects movements and automatically turns on the light in mains operation.



More information

www.rp-group.com/en/item/QCW029ML-AZ-BM



TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP54
Impact resistance (IK)	10
Certification	WEEE, CE, D-Sign
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/



Operating mode	single luminaire switching
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	19 W
Power maintained	17 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Height	106 mm
Diameter	363 mm
Weight	2.57
Weight incl. packaging	2.9
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	1600 lm
Luminous flux emergency	470 lm
Customs tariff number	94056180
EAN	4260682146359




TECHNICAL DRAWING

QCW



QCW

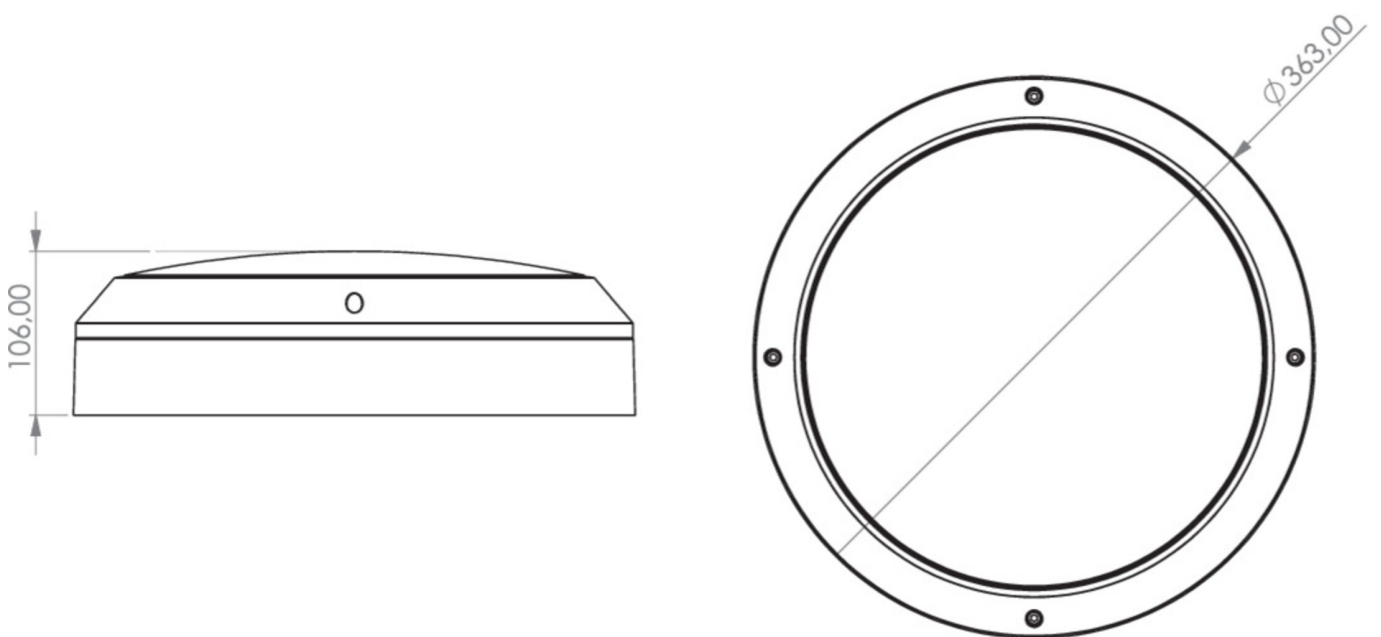

As of: 29.04.2025 - Subject to technical changes and errors.